



# JINKOSOLAR PHOTOVOLTAIC MODULE

USER MANUAL (UL1703)

EDITION 12/2020

*Solar*  
**JinkO**

# CONTENTS

1	General Information	1
1.1	Overview	1
1.2	Warnings	1
2	Installation	4
2.1	Installation Safety	4
2.2	Installation Condition	5
2.2.1	Climate Condition	5
2.2.2	Site Selection	5
2.2.3	Tilt Angle Selection	6
2.3	Mechanical Installation Introduction	7
2.3.1	Mounting with Bolts	8
2.3.2	Mounting with Clamps	9
2.3.2.1	Clamp Mounting on Long Sides of the Frames	11
2.3.2.2	Clamp Mounting on Short Sides of the Frames	12
2.3.2.3	Clamp Mounting on Long/Short Sides of the Frames	13
3	Wiring and Connections	14
4	Maintenance and Care	17
5	Electrical Specification	17
6	Disclaimer of Liability	17
	Appendix 1: Applicable Products	18
	Appendix 2: Electrical Specifications	21
	Contact us	40



# 1. General Information

## 1.1 Overview

In order to ensure the PV modules are installed correctly, please read the following installation instructions carefully before modules are installed and used. Please remember that these products generate electricity and certain safety measures need to be taken to avoid danger. Make sure the module array is designed in such a way as not to exceed the maximum system voltage of any system component such as connectors or inverters.

This module has a Class C Fire Rating (Canada) or Module Fire Performance Type 1 (USA) and must be installed over a roof which has appropriate fire resistance. Before mounting the module, please consult your local building department to determine approved roofing materials. The modules are qualified for application class A, and modules qualified for safety through UL 1703 within this application class are considered to meet the requirements of Safety Class II.


The Fire rating is Class C in Canada, but the Module Fire Performance is Type 1 in the U.S. with the specified construction in the below table. Type 1 modules installed with Class A racking achieves System Class A Fire Rating in the U.S.

Module model	Specific construction	Marking
1 ~ 25	Superstrate: 3.2~4.0 mm thick; EVA: 0.25~0.8 mm thick; Substrate: 0.3~0.46 mm thick;	Module Fire Performance: Type 1

Notes: Group 1~25 refer to appendix 1 for details.



## 1.2 Warnings

- PV modules generate DC electrical energy when exposed to sunlight or other light sources. Active parts of modules such as terminals can result in burns, sparks, and lethal shock.
- Artificially concentrated sunlight shall not be directed on the module or panel.
- Front protective glass is utilized on the module. Broken solar module glass is an electrical safety hazard (may cause electric shock or fire). These modules cannot be repaired and should be replaced immediately.
- To reduce the risk of electrical shocks or burns, modules may be covered with an opaque material during installation to avoid injury

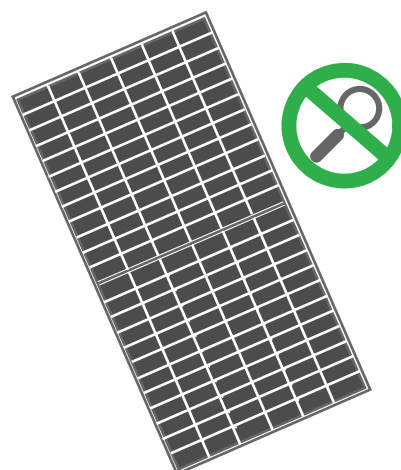



- The fire rating of this module is valid only when mounted in the manner specified in the mechanical mounting instructions.
- The module is considered to be in compliance with UL 1703 only when the module is mounted in the manner specified by the mounting instructions below.
- All installations must be performed in compliance with the National Electrical Code (NEC) and modules installed in Canada need to follow Canadian Electric Code (CEC).
- A module with exposed conductive parts is considered to be in compliance with UL 1703 only when it is electrically grounded in accordance with the instructions presented below and the requirements of the National Electrical Code.
- Any module without a frame (laminate) shall not be considered to comply with the requirements of UL 1703 unless the module is mounted with hardware that has been tested and evaluated with the module under this standard or by a field inspection certifying that the installed module complies with the requirements of UL 1703.
- The installation work of the PV array can only be done under the protection of sun-sheltering covers or sunshades and only qualified personnel can install or perform maintenance work on this module.
- Follow the battery manufacturer's recommendations, if batteries are used with modules.
- Do not use this module to replace or partly replace roofs and walls of buildings.
- Do not install modules where flammable gas may be present.
- Do not touch live terminals with bare hands. Use insulated tools for electrical connections.

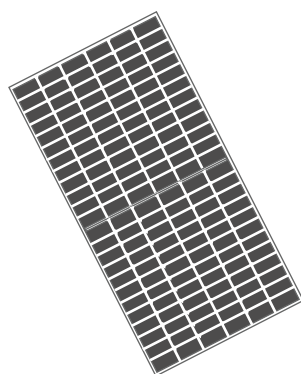

Use insulated tools for electrical connection

- Do not remove any part installed by Jinko Solar or disassemble the module.
- All instructions should be read and understood before attempting to install, wire, operate, and maintain the module.
- Do not lift up PV modules using the attached cables or the junction box.
- All PV systems must be grounded to earth. If there is no special regulation, please follow the National Electrical Code or other national code.
- Common hardware items such as nuts, bolts, star washers, lock washers, and the like have not been evaluated for electrical conductivity or for use as grounding devices and should be used only for maintaining mechanical connections and holding electrical grounding devices in the proper position for electrical conductivity. Such devices, where supplied with the module and evaluated through the requirements in UL 1703, may be used for grounding connections in accordance with the instructions provided with the module.



- Under normal conditions, a module is likely to experience conditions that produce more current and/or voltage than reported at standard test conditions. The requirements of the National Electrical Code (NEC) in Article 690 shall be followed to address these increased outputs. In installations, not under the requirements of the NEC, the value of  $I_{sc}$  and  $V_{oc}$  marked on the module should be multiplied by a factor of 1.25 when determining module voltage ratings, conductor ampacities, overcurrent device ratings, and size of controls connected to the PV output.
- Once the PV module has been shipped to the installation site, all of the parts should be unpacked properly with care.
- Do not stand or step on the PV module like below pictures show. This is prohibited, and there is a risk of damage to the module and injury to you.



- Only PV modules with the same cell size should be connected in series.
- During transportation of modules, please attempt to minimize shock or vibration to the module, as this may damage the module or lead to cell micro cracks.
- During all transportation situations, never drop the module. This will damage the module.
- Do not clean the glass with chemicals. Only use tap water. Make sure the module surface temperature is cool to the touch. Cleaning modules with cool water when module surface temperature is high may result in glass breakage.
- Do not disconnect any of the modules when under load.
- The recommended standoff height is 6 inches (15cm). If other mounting means are employed this may affect the UL Listing.
- When looking at PV modules with anti-reflection (AR) coating technology, it will be normal to see some cells with a slight color difference at different angles. Modules with LRF (light reflective film) and without LRF should not be used in the same array.
- Do not use modules in an environment with aliphatic, aromatic, phenols, ketones, halogenated substance or mineral oil, which may chemically corrode the junction box.
- Do not contact junction box connectors with oily substances (e.g. lubricant, rust inhibitor, etc.)



## 2. Installation

### 2.1 Installation Safety

- Always wear protective head gear, insulating gloves, and safety shoes (with rubber soles).
- Keep the PV module packed in the carton until installation.
- Do not touch the PV module unnecessarily during installation. The glass surface and the frame may be hot. There is a risk of burns and electric shock.
- Do not work in rain, snow, or windy conditions.
- Due to the risk of electrical shock, do not perform any work if the terminals of the PV module are wet.
- Use insulated tools and do not use wet tools.
- When installing PV modules, do not drop any objects (e.g., PV modules or tools).
- Make sure flammable gasses are not generated or present near the installation site.
- The modules are equipped with PV wiring connectors that comply with UL 6703, Standard for Connectors for use in Photovoltaic Systems. Connectors from different manufacturers should not be mated together.

Connector model name (female)	Allowable mating connector model name(male)
TL-Cable01F (female)	TL-Cable01M (male)
PV-JK00M0 (female)	PV-JK00M0 (male)
UTXCFA4A (female)	UTXCMA4A* (male)
Helios H4 Assembled (female)	Helios H4 Assembled (male)
PV-JK03M-1 (female)	PV-JK03M-1 (male)
PV-KBT4/6II-UR (female)	PV-KST4/6II-UR (male)
PV-JK03M-2 (female)	PV-JK03M-2 (male)
PV-JK03M-F/xy (female)	PV-JK03M-M/xy (male)
PV-KBT4-EV02/6II-UR (female)	PV-KST4-EV02/6II-UR (male)
PV-JK03M-F/2B (female)	PV-JK03M-M/2B (male)
PV-JK03M-F/1B (female)	PV-JK03M-M/1B (male)
PV-JK03M2-F/2B (female)	PV-JK03M2-M/2B (male)
PV-JK03M1-F/2B (female)	PV-JK03M1-M/2B (male)
PV-KBT4-EV02/6I-UR (female)	PV-KST4-EV02/6I-UR (male)

**Table 1: Allowable mating connector model name**

- Insert module connectors fully and correctly. An audible “click” sound should be heard. This sound confirms that the connectors are fully seated. Check all connections.
- The module leads should be securely fastened to the module frame. Wire Management should be done in a way to prevent the connector from scratching or impacting the back sheet of the module.



- Do not touch the junction box and the end of the interconnect cables (connectors) with bare hands during installation or under sunlight, whether or not the PV module is connected to or disconnected from the system.
- Do not expose the PV module to excessive loads on the surface of the PV module or twist the frame.
- Do not hit or put excessive load on the glass or back sheet; this may break the cells or cause micro cracks.
- During installation or operation, do not use sharp tools to wipe the back sheet and glass. Scratches can appear on the module.
- Do not drill holes in the frame; it may cause corrosion of the frame and void the warranty.
- When installing modules on roof mounted structures, please try to follow the “from top to bottom” and/or “from left to right” principle, and do not step on the module. This will damage the module and would be dangerous for personal safety. In roof mounting applications, the assembly is to be mounted over a fire resistant roof covering rated for the application.
- All PV systems must be grounded to earth (Refer to 3. “Wiring and connection” for specific grounding).

## 2.2 Installation Condition

### 2.2.1 Climate Condition

Please install the modules in the following conditions:

- a) Operating temperature:  $-40^{\circ}\text{C}$  ( $-40^{\circ}\text{F}$ ) to  $85^{\circ}\text{C}$  ( $185^{\circ}\text{F}$ ).
- b) Humidity:  $< 85\text{RH}\%$ .

\*Note:

The mechanical load bearing (include wind and snow loads) of the module is based on the approved mounting methods. The professional system installer must be responsible for mechanical load calculation according to the system design.

### 2.2.2 Site Selection

In most applications, Jinko Solar PV modules should be installed in a location where they will receive maximum sunlight throughout the year. In the Northern Hemisphere, the module should typically face south, and in the Southern Hemisphere, the modules should typically face north. Modules facing 30 degrees away from true South (or North) will lose approximately 10 to 15 percent of their power output. If the module faces 60 degrees away from true South (or North), the power loss will be 20 to 30 percent.

When choosing a site, avoid trees, buildings, or obstructions, which could cast shadows on the modules, especially during the winter months when the arc of the sun is lowest over the horizon. Shading causes loss of output, even though the factory fitted bypass diodes of the PV module will minimize any such loss.

Do not install the PV module near open flame or flammable materials.




When solar modules are used to charge batteries, the battery must be installed in a manner, which will protect the performance of the system and the safety of its users. Follow the battery manufacturer's guidelines concerning installation, operation, and maintenance recommendations. Do not install the PV module in a location where it would be immersed in water or continually exposed to water from a sprinkler, fountain, or other liquid.

### 2.2.3 Tilt Angle Selection

The tilt angle of the PV module is measured between the surface of the PV module and a horizontal ground surface (Figure 1). The PV module generates maximum output power when it faces the sun directly.

When the PV modules are attached to a permanent structure, the tilt angle of the PV modules should be selected to optimize the performance based on seasonal load and sunlight. In general, if the PV output is adequate when irradiance is low (e.g., winter), then the angle chosen should be adequate during the rest of the year. For grid-connected installations where the PV modules are attached to a permanent structure, PV modules should be tilted so that the energy production from the PV modules will be maximized on an annual basis. The System Fire Class Rating of a module or panel in a roof mounted system should meet local code requirements in order to achieve the specified System Fire Class Rating for a

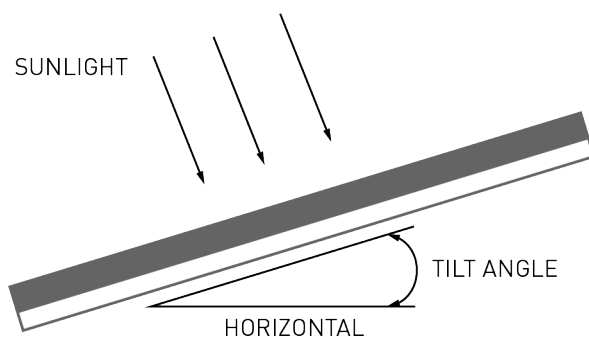

**Figure1: PV module tilt angle**

non-BIPV module or panel. A minimum slope of  $22.5^\circ$  is required for installations in roof mounted systems in order to maintain the fire class ratings. Any module or panel racking system may have limitations or other requirements on inclination in order to maintain a specific System Fire Class Rating.

For bifacial modules, the suggested installation tilt angle and height is 30 degree and 1.2m, respectively. For different ground cover conditions, like snow, grass, desert, water surface, cement land and so on, the expectation generation energy gain varied from 4% to 24%, as shown in figure 2.

- i) The reflectivity of snow is 80%-85%, generation energy will be increased by 17%-24%.
- ii) The reflectivity of desert is 22%-25%, generation energy will be increased by 7%-14%.
- iii) The reflectivity of cement is 30%-33%, generation energy will be increased by 6%-13%.
- iv) The reflectivity of grass is 10%-20%, generation energy will be increased by 6%-8%.
- v) The reflectivity of water is 2%-5%, generation energy will be increased by 4%-7%.



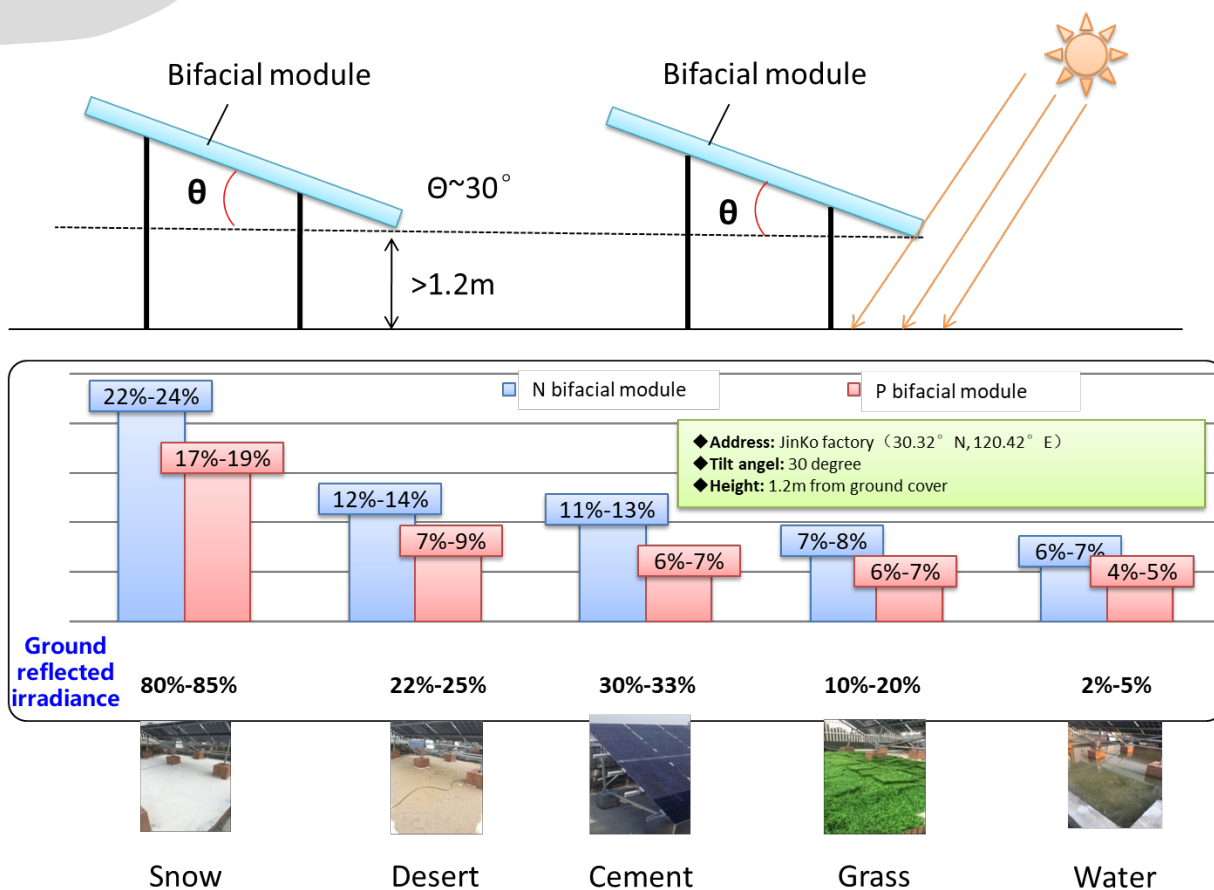


Figure2: PV module installed on different ground covers

## 2.3 Mechanical Installation Introduction

PV modules usually can be mounted by using the following methods: bolts and clamps.

**\*Note:**

- All installation methods herein are only for reference, and Jinko Solar will not provide related mounting tools. The system installer or trained professional personnel must be responsible for the PV system's design, installation, and mechanical load calculation and security of the system.
- Before installation, the following items should be addressed:
  - Visually check the module for any damage. Clean the module if any dirt or residue remains from shipping.
  - Check if module serial number stickers match.
  - The minimum distance between modules should be more than 10mm for all installation methods.
- The mounting with bolts and/or clamps on the long side of the frames can meet a maximum positive testing (downward) pressure of 5400Pa and negative testing (upward) pressure of 2400Pa. When mounting modules in snow-prone or high-wind environments, special care should be taken to mount the modules in a manner that provides sufficient design strength while meeting local code requirements.



4. Where common grounding hardware (nuts, bolts, star washers, split-ring lock washers, flat washers, and the like) is used to attach a listed grounding/bonding device, the attachment must be made in conformance with the grounding device manufacturer's instructions.
5. Common hardware items such as nuts, bolts, star washers, lock washers, and the like have not been evaluated for electrical conductivity or for use as grounding devices and should be used only for maintaining mechanical connections and holding electrical grounding devices in the proper position for electrical conductivity. Such devices, where supplied with the module and evaluated through the requirements in UL 1703, may be used for grounding connections in accordance with the instructions provided with the module.
6. The use of third-party grounding devices is not allowed unless the grounding device is UL2703 certified with Jinko modules. The installation of that grounding hardware must follow the grounding manufacturer's installation manual.
7. The clearance between the module and the roof deck should be a minimum of 0.6 inches (15mm).

### 2.3.1 Mounting with Bolts

The frame of each module has 8 mounting holes or 12 mounting holes used to secure the module to support structure. The module frame must be attached to a mounting rail using M8 corrosion-proof bolts together with spring washers and flat washers in eight symmetrical locations on the PV module. The applied torque value should be big enough to fix the modules steadily. The torque value for M8 bolt is 16~20 N\*m and M6 bolt is 8 N\*m. For special racking systems or systems with special installation requirements, please reconfirm with the supplier for the appropriate torque value. Please find detailed mounting information in Figure 2. The installation instructions shall specify that the modules have been evaluated by UL for bolt mounting using the 8 provided mounting holes in the frame with a torque of 16~20 N\*m. The following stainless steel mounting hardware should be included in the installation instructions: For eight 14x9 holes for M8 and four 10x7 holes for M6 (Red label for mounting hole), mounting hardware is shown below in Table 2:

Module	Mounting hardware configuration				Max. Pressure
1 ~ 25	Hardware	Material	Size(holes)		Test load: 5400Pa (positive) & 2400Pa (negative)  Design load: 3600Pa (positive) & 1600Pa (negative)
			14x9	10x7	
	Bolt	Stainless Steel	M8	M6	
	Spring washer	Stainless Steel	M8	M6	
	Nut	Stainless Steel	M8	M6	8 M8 or 8 M8 & 4 M6

**Table 2: The mounting part for eight mounting holes**

\*Alternate Mounting Method – bolting mounting method using the 12 (8 M8 or 8 M8 & 4 M6) provided mounting holes in the frame with a torque of 16~20 N\*m. The following stainless steel mounting hardware should be included in the installation instructions

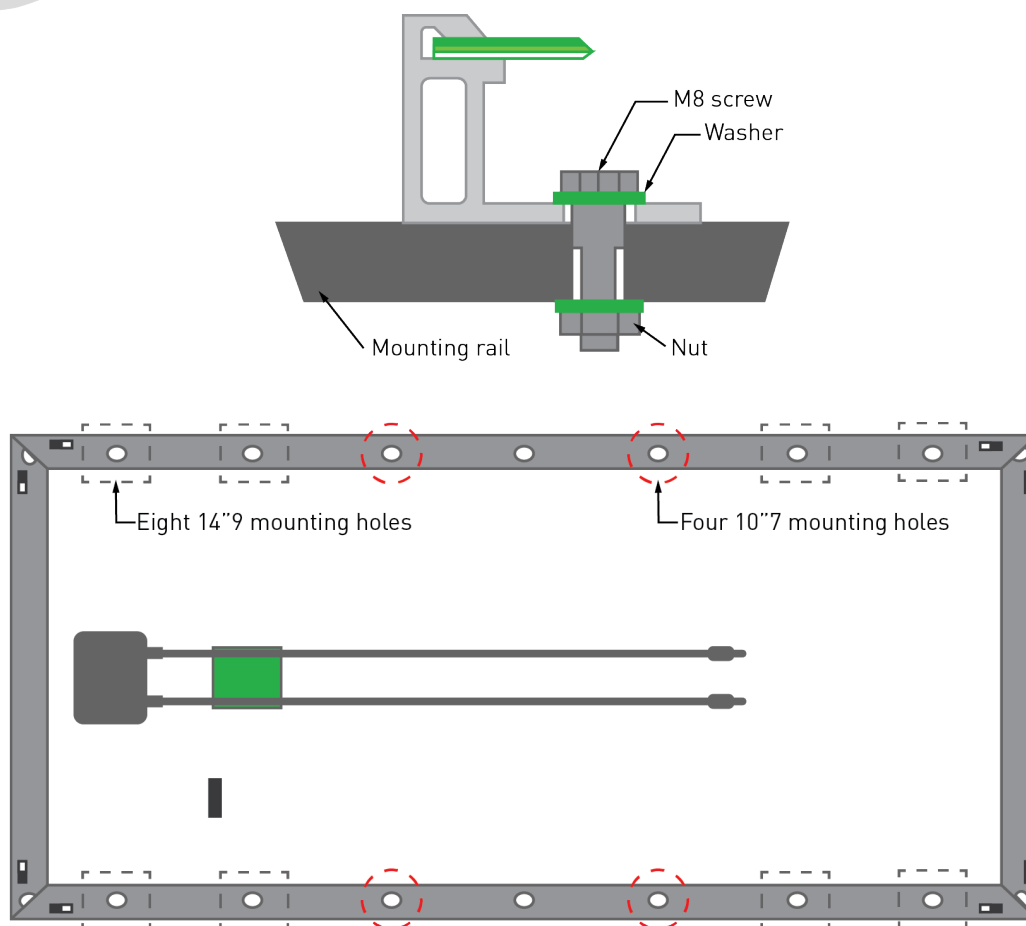



Figure 3: PV module installed with Bolt fitting method

### 2.3.2 Mounting with Clamps



The module clamps should not come into contact with the front glass and must not deform the frame. Be sure to avoid shading effects from the module clamps. The module frame is not to be modified under any circumstances. When choosing this type of clamp-mounting method, please be sure to use at least four clamps on each module. Two clamps should be attached on each long side of the module. The applied torque value should be high enough to mount the modules steadily. (Please consult with the clamp or racking supplier for the specific torque value). Please find detailed mounting information in the below illustration. The mounting zone is greater than J and less than K. Figure 4 shows how a clamp should be mounted to the module frame.

When installing modules using clamps on the long side of the frame, the applicable product types and installation locations are shown in Figure 5 and Table 4. When installing modules using clamps on the short side of the frame, the applicable product types and installation locations are shown in Figure 6 and Table 5.

When installing modules using clamps on the long side & short side of the frame, the applicable product types and installation locations are shown in Figure 7 and Table 6.

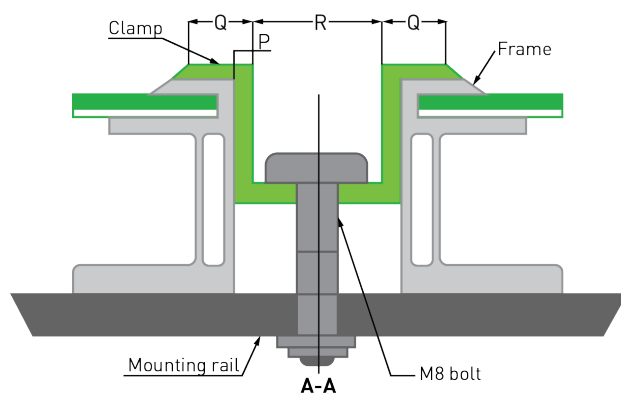

Middle modules installation

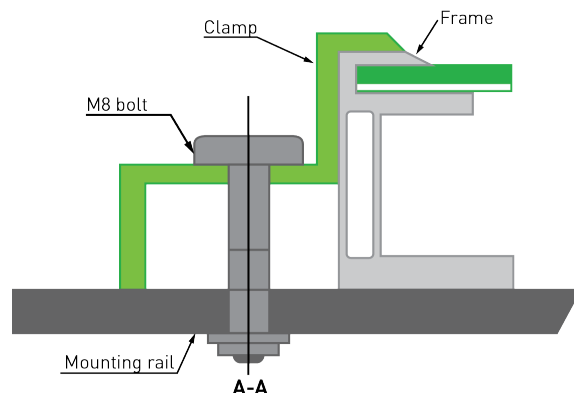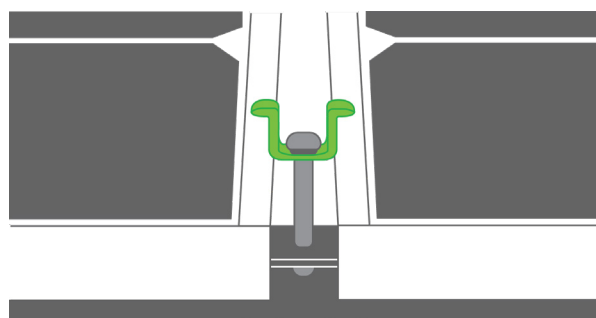

Fringe modules installation

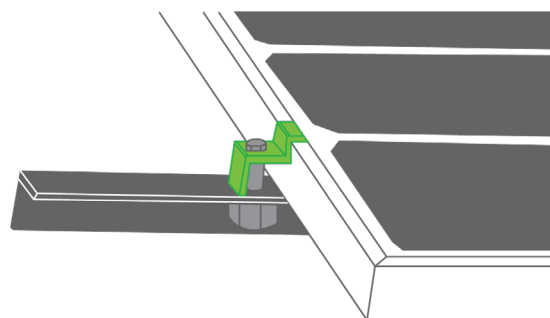


Figure 4: PV module installed at the side with Clamp fitting method

Clamp type	Dimension (mm)			Composition material
End Clamp (40 mm thickness)	39 x 50 x 42 39 x 60 x 42 (For 1.5mm thickness frame)			Aluminum-alloy
End Clamp (35 mm thickness)	41.5 x 50 x 40			
Middle Clamp (40 mm & 35 mm thickness)	42 x 50 x 28 42 x 60 x 28 (For 1.5mm thickness frame)			
	Q	R	P	
	13.5	15	2.5	

Table 3: Mechanical dimensions, specification and material when modules installed with mid Clamp

### 2.3.2.1 Mounting with Clamps at Long Sides of the Frames

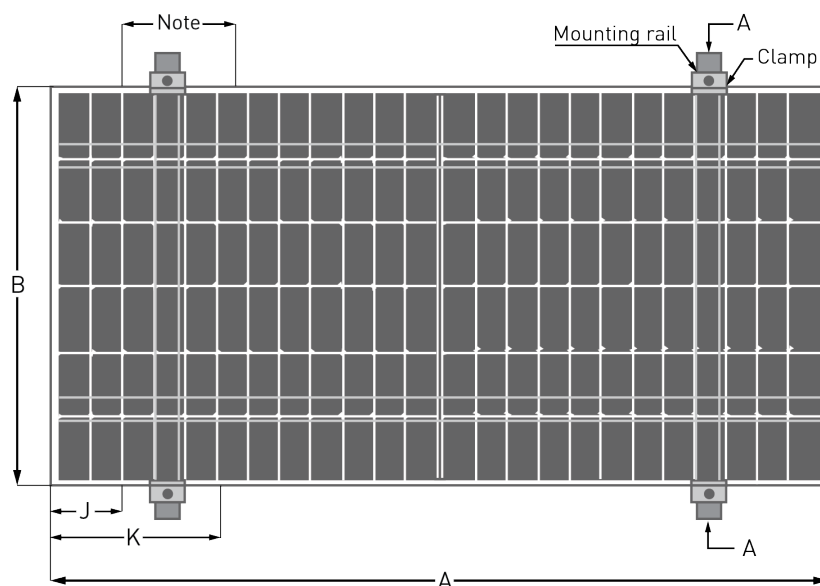


Figure 5: Installation methods of clamps on long sides

Module type	Dimension (mm)		
	Max. Test Pressure: 5400Pa (positive) & 2400Pa (negative) mechanical load		
	A*B*C	J	K
Group 2, 8, 18	1665*992*40 1684*1002*40 1665*992*35 1684*1002*35	400	420
	1684*1002*30	A/4-50	A/4+50
Group 5, 11, 19	1987*992*40 & 2000*992*40 & 2008*1002*40	400	480
	2008*1002*30	A/4-50	A/4+50
Group 1, 3	1650*992*40 1665*1002*40 1650*992*35 1665*1002*35	400	420
Group 4, 6	1956*992*40 1979*1002*40	400	480
Group 7, 9, 17	1650*992*40 1665*1002*40 1650*992*35 1665*1002*35	400	420
Group 10, 12	1956*992*40 1979*1002*40	400	480




Group 13, 15	2031*1008*40	280	420
	2031*1008*30	A/4-50	A/4+50
Group 14, 16	1704*1008*35	280	420
	1704*1008*30	A/4-50	A/4+50
Group 20, 23	2182*1029*40 2182*1032*40	430	570
Group 21, 24	1855*1029*35 1855*1032*35	280	420
Group 22, 25	1692*1029*30	A/4-50	A/4+50
Group 2, 8 (Tape Frame Series Modules)	1684*1002*35	280	420
Group 5, 11 (Tape Frame Series Modules)	2008*1002*40	280	420
	Max. Test Pressure: 5400Pa (positive) & 4000Pa (negative) mechanical load		
Group 2	1684*1002*35	250	250

**Table 4: Mechanical dimensions when modules installed at long side with Clamp**

Note: The installation method of 5400Pa (positive) & 4000Pa (negative) is based on the experimental results in Jinko, not evaluated by UL.

### 2.3.2.2 Clamping Mounting on Short Sides of the Frames

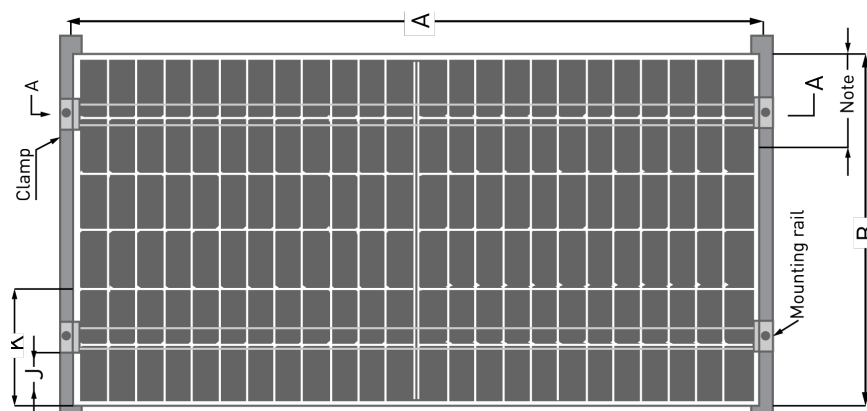

**Figure 6: Installation of clamps on short side of frames**




Module type	Dimension (mm)		
	Max. Test Pressure: 1600Pa (positive) & 1600Pa (negative) mechanical load		
	A*B	J	K
Group 2, 8, 18	1665*992*40 1684*1002*40 1665*992*35 1684*1002*35	50	240
Group 5, 11, 19	1987*992*40 2000*992*40 2008*1002*40	50	240
Group 1, 3	1650*992*40 1665*1002*40 1650*992*35 1665*1002*35	50	240
Group 7, 9, 17	1650*992*40 1665*1002*40 1650*992*35 1665*1002*35	50	240
Group 4, 6	1956*992*40 1979*1002*40	50	240
Group 10.12	1956*992*40 1979*1002*40	50	240
Group 13, 15	2031*1008*40	50	240
Group 14, 16	1704*1008*35	50	240

**Table 5: Mechanical dimensions of modules installed with clamps on short side of frame**

Note: The installation method of clamps on short sides is based on Jinko's internal results and have not been evaluated by UL.

### 2.3.2.3 Clamping Mounting on Long/Short Sides

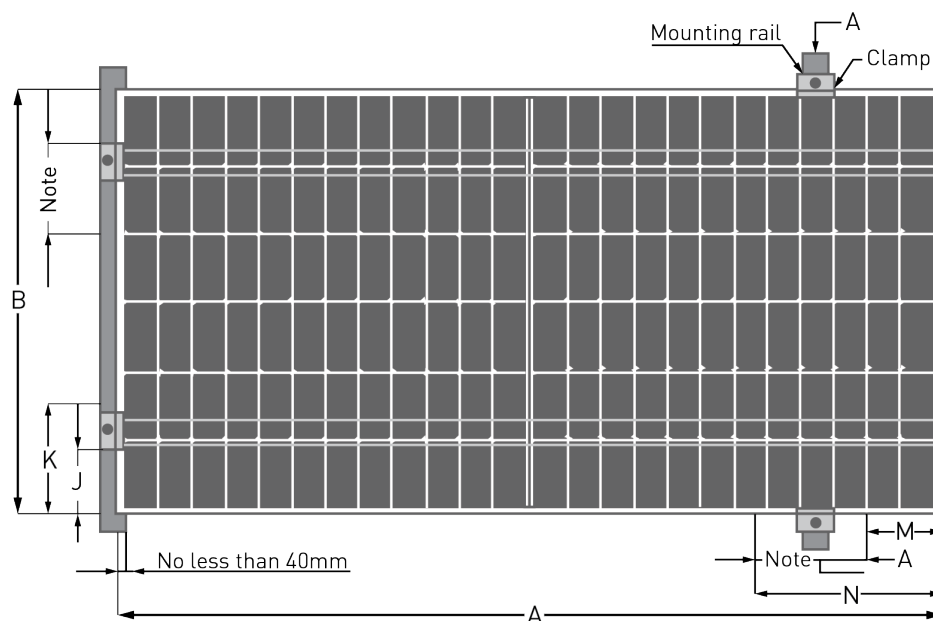

**Figure 7: Installation of clamps on long/short side of frame**



Module type	Dimension (mm)				
	Max. Test Pressure: 2400Pa (positive) & 2400Pa (negative) mechanical load				
	A*B	J	K	M	N
Group 1, 3	1650*992*40 1665*1002*40 1650*992*35 1665*1002*35	50	240	400	420
Group 7, 9, 17	1650*992*40 1665*1002*40 1650*992*35 1665*1002*35	50	240	400	420
Group 4, 6	1956*992*40 1979*1002*40	50	240	400	480
Group 10, 12	1956*992*40 1979*1002*40	50	240	400	480
Group 2, 8, 18	1665*992*40 1684*1002*40 1665*992*35 1684*1002*35	50	240	400	420
Group 5, 11, 19	1987*992*40 2000*992*40 2008*1002*40	50	240	400	480
Group13, 15	2031*1008*40	50	240	400	480
Group14, 16	2031*1008*40	50	240	400	480
Group 20, 23	2182*1029*40 2182*1032*40	130	240	A/4-50	A/4+50


**Table 6: Mechanical dimensions of modules installed with clamps on long & short side of frame**

Note: The installation method of clamps on long and short sides (Group 22 & 23) is based on Jinko's internal results and have not been evaluated by UL.

### 3. Wiring and Connection

1. Before this procedure, please read the operating instructions of the PV system carefully. Connect the PV module connections in series or parallel, as determined by the user's configuration requirement for system power, current, and voltage.
2. PV modules connected in series should have similar current, and modules must not be connected together to create a voltage higher than the permitted system voltage. The maximum number of modules in series depends on system design, the type of inverter used, and environmental conditions.
3. The maximum current rating of overcurrent protection in an array string can be found on the product label or in the product datasheet. The current rating of overcurrent protection also corresponds to the maximum reverse current that a module can withstand, e.g. when one string is in shade then the other parallel strings of modules will be loaded by the shaded string, and the current will pass through to create a



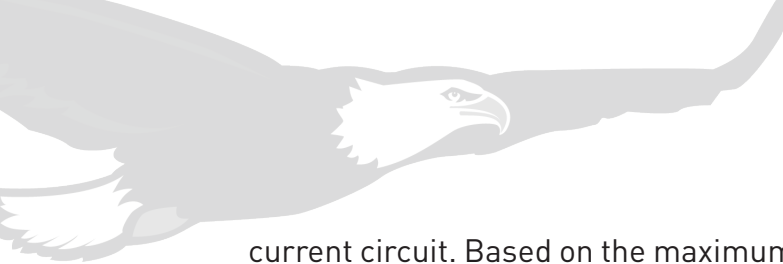

current circuit. Based on the maximum series current rating of overcurrent protection of module and local electrical codes and standards, make sure the module strings in parallel are protected with the appropriate in- line string fusing. Recommended maximum series/parallel module configurations;  $[(1500\text{ V}/(1.25 \times V_{oc}))]/[\text{current rating of overcurrent protection}/I_{sc}+1]$ .

- 4. Connect the conductors from the PV array to the combiner box in accordance with the design and local codes and standards. The cross-sectional area and cable connector capacity must satisfy the maximum short-circuit of the PV system (for a single module, it is recommended that the cross-sectional area of cables be 4mm<sup>2</sup> and the rated current of connectors be more than 10A); otherwise cables and connectors will become overheated from high current. Please note the temperature limit of the cables is 90°C.
- 5. Jinko modules can be grounded using bolts. Attach the equipment grounding conductor to the module frame using the hole and hardware provided. Note that a stainless steel bolt is used between the ground wire and module frame as illustrated in the following figure. A washer is used to avoid corrosion due to dissimilar metals. Tighten the screw securely. It is recommended that the applied torque is 1.7~2.0 ft-lbs (2.3 to 2.8 N\*m).

Module	Mounting hardware configuration			
	Hardware	Material	Size	Number provided
Group 1 ~ 25	Bolt	Stainless steel	M4	2
	Spring washer	Stainless steel	M4	2
	Nut	Stainless steel	M4	2
	Star washer	Stainless steel	M4	2
	Plain washer	Stainless steel	M4	4

Table 7: The mounting part of the ground mounting hole

The use of bolt grounding devices is not allowed unless the grounding device is UL1703 or UL2703 certified with Jinko modules. Alternate grounding options built into the racking system are acceptable as long as they have been UL approved.

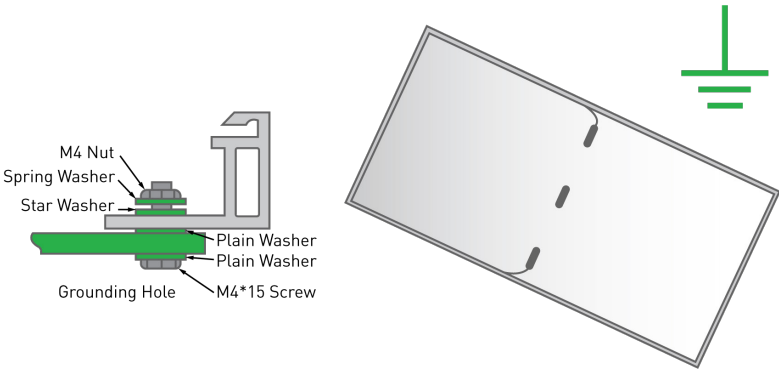


Figure 8: Ground Installation PV modules

6. Other third party grounding methods cannot be used unless the grounding device is UL2703 certified with Jinko modules.


Module Series	Grounding Clip	
Group 1 ~ 25	Manufacturer	Type
	Tyco Electronics Corp	1954381-1

**Table 8: The ground mounting Clip of PV modules**

7. Follow the requirements of applicable local and national electrical codes.
8. These modules contain factory installed bypass diodes. If these modules are incorrectly connected to each other, the bypass diodes, cable, or junction box may be damaged.
9. The module shall wire in accordance with the NEC. The grounding method of the frame of arrays shall comply with the NEC, article 250.
10. CNL model shall be in accordance with CSA C22.1, Safety Standard for Electrical Installations, Canadian Electrical Code, Part 1.
11. It is recommended that the M8 bolt be tightened to a torque of about 16~20 N\*m and the M6 bolt be tightened to a torque of about 8 N\*m.
12. The junction box cable is defined as L, as seen below. Since cable lengths vary by module type, please review the data sheet for the model being installed. It is recommended that cable lengths be considered before designing the wiring layout.



**Figure 9 (1): The full module junction box**

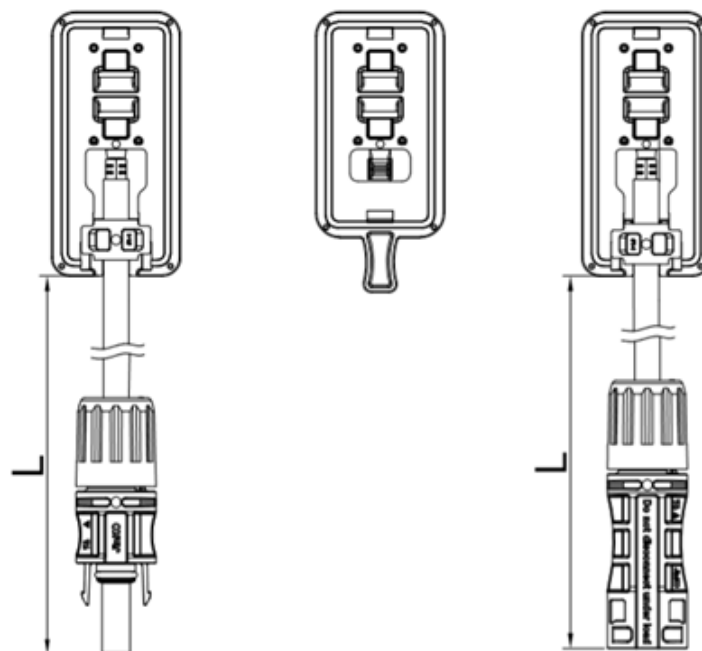

**Figure 9 (2): The G2/G3 module junction box**



13. Jinko Solar requires the negative grounding of the inverter when a system is installed with standard PV solar modules. Alternatively, a 'charge-equalizing' device may be used to mitigate the effects of the Potential Induced Degradation (PID) phenomenon that can occur in specific environments that the array is installed in.

## 4. Maintenance and Care

1. A building up of dust or dirt on the module's front glass will result in a decreased energy output. Clean the modules preferably once annually (depending on site conditions) using a soft, dry or damp cloth, as necessary.
2. Never use abrasive material under any circumstances.
3. Examine the PV module(s) for signs of deterioration. Check all wiring for possible rodent damage and, weathering. Check that all connections are tight and corrosion free. Check electrical leakage to ground.
4. Check that fixing screws/bolts and mounting brackets are tight. Adjust and tighten as necessary.
5. Check the junction box and diodes as well. If you have any diodes problems, please contact Jinko Solar.
6. When cleaning the modules, it is not permitted to stand on the module.
7. Never use chemicals when cleaning modules as this may affect the module warranty

## 5. Electrical Specification

The module electrical ratings are measured under Standard Test Conditions (1000 W/m<sup>2</sup>, (25± 2) °C, AM 1,5 according to IEC 60904-3). The module might produce more or less voltage or current than rated value in non-standard conditions. Tables in Appendix 2 are electrical characteristics of PV products at STC and the tolerance is ±10% of I<sub>sc</sub>, ±10% of V<sub>oc</sub> and P<sub>max</sub>, ±10% of V<sub>mp</sub> and I<sub>mp</sub>. The protection class of module is Class II.

## 6. Disclaimer of Liability

Because the use of the manual and the conditions or methods of installation, operation, use, and maintenance of (PV) modules are beyond Jinko's control, Jinko does not accept responsibility and expressly disclaims liability for loss, damage, or expense arising out of or in any way connected with such installation, operation, use, or maintenance.

No responsibility is assumed by Jinko for any infringement of patents or other rights of third parties, which may result from use of the PV module. NO license is granted by implication or otherwise under any patent or patent rights. The information in this manual is based on Jinko's knowledge and experience and is believed to be reliable, but such information including product specification (without limitations) and suggestions do not constitute a warranty, expresses or implied. Jinko reserves the right to change the installation manual, the PV module, the electrical specifications, or product information sheets without prior notice.



## Appendix 1 : Applicable Products

This document is applicable to the series of solar modules as listed below:

### Group 1

JKMxxxP-60	JKMxxxP-60B <sup>①</sup>	JKMxxxP-60-J4 <sup>②</sup>	JKMxxxP-60B-J4
JKMxxxPP-60 <sup>③</sup>	JKMxxxPP-60B	JKMxxxPP-60(Plus) <sup>④</sup>	JKMxxxPP-60-J4
JKMxxxPP-60B-J4	JKMxxxPP-60-W <sup>⑤</sup>	JKMxxxPP-60B-W	JKMxxxPP-60B-V
JKMxxxP-60-V <sup>⑥</sup>	JKMxxxPP-60-V	JKMxxxPP-60-V(Plus)	JKMxxxPP-60-WV

(xxx=200~300, in increment of 5)

### Group 2

JKMxxxPP-60H <sup>⑦</sup>	JKMxxxPP-60H-J4	JKMxxxPP-60HB	
JKMxxxPP-60H-V	JKMxxxPP-60H-J4-V	JKMxxxPP-60HB-V	JKMxxxPP-60H-V

(xxx =200~310, in increment of 5)

### Group 3

JKMS <sup>⑧</sup> xxxP-60	JKMSxxxP-60-J4	JKMSxxxP-60B	JKMSxxxP-60B-J4
JKMSxxxPP-60	JKMSxxxPP-60-J4	JKMSxxxPP-60B-J4	JKMSxxxPP-60B
JKMSxxxPP-60-W	JKMSxxxPP-60B-W		

(xxx =200~275, in increment of 5)

### Group 4

JKMxxxP-72	JKMxxxP-72B	JKMxxxP-72-J4	JKMxxxP-72B-J4
JKMxxxPP-72	JKMxxxPP-72B	JKMxxxPP-72(Plus)	JKMxxxPP-72-J4
JKMxxxPP-72B-J4	JKMxxxPP-72-W	JKMxxxPP-72B-W	JKMxxxPP-72B-V
JKMxxxP-72-V	JKMxxxPP-72-V	JKMxxxPP-72-V(Plus)	JKMxxxPP-72-WV

(xxx =250~360, in increment of 5)

### Group 5

JKMxxxPP-72H	JKMxxxPP-72H-J4	JKMxxxPP-72HB	
JKMxxxPP-72H-V	JKMxxxPP-72H-J4-V	JKMxxxPP-72HB-V	

(xxx =250~370, in increment of 5)

### Group 6

JKMSxxxP-72	JKMSxxxP-72-J4	JKMSxxxP-72B-J4	JKMSxxxP-72B
JKMSxxxPP-72	JKMSxxxPP-72-J4	JKMSxxxPP-72B-J4	JKMSxxxPP-72B
JKMSxxxPP-72-W	JKMSxxxPP-72B-W		

(xxx =250~330, in increment of 5)

### Group 7

JKMxxxM-60	JKMxxxM-60B	JKMxxxM-60-J4	JKMxxxM-60B-J4
JKMxxxM-60-W	JKMxxxM-60B-W		
JKMxxxM-60-V	JKMxxxM-60-W-V	JKMxxxM-60B-V	

(xxx =200~330, in increment of 5)

JKMxxxM-60L <sup>⑨</sup>	JKMxxxM-60BL	JKMxxxM-60L-V	JKMxxxM-60BL-V
--------------------------	--------------	---------------	----------------

(xxx =300~330, in increment of 5)



#### Group 8

JKMxxxM-60H	JKMxxxM-60HB	JKMxxxM-60H-V	JKMxxxM-60HB-V
-------------	--------------	---------------	----------------

(xxx =200~350, in increment of 5)

JKMxxxM-60HL	JKMxxxM-60HBL	JKMxxxM-60HL-V	JKMxxxM-60HBL-V
--------------	---------------	----------------	-----------------

(xxx =300~350, in increment of 5)

#### Group 9

JKMSxxxM-60	JKMSxxxM-60-J4	JKMSxxxM-60-W	
-------------	----------------	---------------	--

(xxx =200~295, in increment of 5)

#### Group 10

JKMxxxM-72	JKMxxxM-72B	JKMxxxM-72-J4	JKMxxxM-72B-J4
------------	-------------	---------------	----------------

JKMxxxM-72-W	JKMxxxM-72B-W		
--------------	---------------	--	--

JKMxxxM-72-V	JKMxxxM-72-W-V	JKMxxxM-72B-V	
--------------	----------------	---------------	--

(xxx =250~400, in increment of 5)

JKMxxxM-72L	JKMxxxM-72L-V	JKMxxxM-72BL	JKMxxxM-72BL-V
-------------	---------------	--------------	----------------

(xxx =370~400, in increment of 5)

#### Group 11

JKMxxxM-72H	JKMxxxM-72HB	JKMxxxM-72H-V	JKMxxxM-72HB-V
-------------	--------------	---------------	----------------

(xxx =250~420, in increment of 5)

JKMxxxM-72HL	JKMxxxM-72HL-V	JKMxxxM-72HBL	JKMxxxM-72HBL-V
--------------	----------------	---------------	-----------------

(xxx =370~420, in increment of 5)

#### Group 12

JKMSxxxM-72	JKMSxxxM-72-J4	JKMSxxxM-72-W	
-------------	----------------	---------------	--

(xxx =250~355, in increment of 5)

#### Group 13

JKMxxxM-72HL-TV			
-----------------	--	--	--

(xxx =375~420, in increment of 5)

JKMBxxxM-72HL-TV			
------------------	--	--	--

(xxx =410~455, in increment of 5)

#### Group 14

JKMxxxM-60HL-TV			
-----------------	--	--	--

(xxx =315~350, in increment of 5)

JKMBxxxM-60HL-TV			
------------------	--	--	--

(xxx =345~380, in increment of 5)

#### Group 15

JKMxxxN-72HL-TV			
-----------------	--	--	--

(xxx =375~400, in increment of 5)

JKMBxxxN-72HL-TV			
------------------	--	--	--

(xxx =420~445, in increment of 5)



#### Group 16

JKMxxxN-60HL-TV			
-----------------	--	--	--

(xxx =315~330, in increment of 5)

JKMBxxxN-60HL-TV			
------------------	--	--	--

(xxx =350~365, in increment of 5)

#### Group 17

JKMxxxM-60L-Q	JKMxxxM-60BL-Q		
---------------	----------------	--	--

(xxx =300~330, in increment of 5)

#### Group 18

JKMxxxM-60HL-Q	JKMxxxM-60HBL-Q		
----------------	-----------------	--	--

(xxx =300~350, in increment of 5)

#### Group 19

JKMxxxM-72HL-Q	JKMxxxM-72HBL-Q	JKMxxxM-72HL-V-Q	
----------------	-----------------	------------------	--

(xxx =370~420, in increment of 5)

#### Group 20

JKMxxxN-7RL3	JKMxxxN-7RL3-V		
--------------	----------------	--	--

(xxx =430~475, in increment of 5)

#### Group 21

JKMxxxN-6RL3	JKMxxxN-6RL3-V		
--------------	----------------	--	--

(xxx =365~400, in increment of 5)

#### Group 22

JKMxxxN-6TL3	JKMxxxN-6TL3-V		
--------------	----------------	--	--

(xxx =330~365, in increment of 5)

#### Group 23

JKMxxxM-7RL3	JKMxxxM-7RL3-V		
--------------	----------------	--	--

(xxx =430~475, in increment of 5)

#### Group 24

JKMxxxM-6RL3	JKMxxxM-6RL3-V		
--------------	----------------	--	--

(xxx =365~400, in increment of 5)

#### Group 25

JKMxxxM-6TL3	JKMxxxM-6TL3-V		
--------------	----------------	--	--

(xxx =330~365, in increment of 5)



Notes:

- B: Module with black back sheet
- J4: Eagle black series module
- PP: Eagle series module
- Plus: Eagle+ series module
- W: Module with metal support bar
- V: Module with 1500V
- H: Half-cut series module
- JKMS: Smart module
- L: G2 series module
- TV: G3 bifacial module
- L3: G4 TR series module

## Appendix 2 : Electrical Specifications

For the tolerance of electrical characteristics and protection class of modules, please refer to Section 5 “Electrical Specification”.

Module Type	Group 1 & 2										
xxx =	200	205	210	215	220	225	230	235	240	245	250
Maximum Power at STC (Pmax, Wp)	200	205	210	215	220	225	230	235	240	245	250
Maximum Power Voltage (Vmp, V)	28.2	28.4	28.6	28.8	29.0	29.2	29.4	29.6	29.8	30.1	30.5
Maximum Power Current (Imp, A)	7.09	7.22	7.34	7.47	7.59	7.71	7.82	7.94	8.06	8.14	8.20
Open-circuit Voltage (Voc, V)	35.3	35.5	35.8	36.1	36.3	36.6	36.8	37.0	37.3	37.5	37.7
Short-circuit Current (Isc, A)	8.09	8.18	8.25	8.31	8.41	8.48	8.56	8.65	8.71	8.76	8.85



Module Type	Group 1 & 2										Group 2	
xxx =	255	260	265	270	275	280	285	290	295	300	305	310
Maximum Power at STC (Pmax, Wp)	255	260	265	270	275	280	285	290	295	300	305	310
Maximum Power Voltage (Vmp, V)	30.8	31.1	31.4	31.7	32.0	32.3	32.5	32.8	33.1	33.4	33.6	33.9
Maximum Power Current (Imp, A)	8.28	8.37	8.44	8.52	8.61	8.69	8.77	8.86	8.95	9.03	9.11	9.19
Open-circuit Voltage (Voc, V)	38.0	38.1	38.6	38.8	39.1	39.4	39.6	39.8	40.1	40.3	40.6	40.8
Short-circuit Current (Isc, A)	8.92	8.98	9.03	9.09	9.15	9.20	9.26	9.32	9.37	9.43	9.49	9.59
Maximum System Voltage	1000VDC/1500VDC											
Dimensions	Normal PV module:1650x992x40mm (64.97×39.05 x1.57 inch) Large cell PV module:1665x1002x40mm (65.55×39.45 x1.57 inch) Half-cut PV module:1665x992x40mm (65.55×39.05 x1.57 inch) Large cell Half-cut PV module:1684x1002x40mm (66.30×39.45 x1.57 inch) Large cell PV module:1665x1002x35mm (65.55×39.45 x1.38 inch) Normal PV module:1650x992x35mm (64.97×39.05 x1.38 inch) Half-cut PV module:1665x992x35mm (65.55×39.05 x1.38 inch) Large cell Half-cut PV module:1684x1002x35mm (66.30×39.45 x1.38 inch)											
Maximum series overcurrent protective device rating	20A											

Module Type	Group 3							
xxx =	200	205	210	215	220	225	230	235
Maximum Power at STC (Pmax, Wp)	200	205	210	215	220	225	230	235
Maximum Power Voltage (Vmp, V)	26.8	27.0	27.2	27.4	27.6	27.2	27.9	28.1
Maximum Power Current (Imp, A)	7.46	7.60	7.73	7.86	7.98	8.12	8.23	8.36
Open-circuit Voltage (Voc, V)	33.5	33.7	34.0	34.3	34.5	34.8	35.0	35.2
Short-circuit Current (Isc, A)	8.53	8.61	8.68	8.75	8.85	8.92	9.01	9.10





Module Type	Group 3							
xxx=	240	245	250	255	260	265	270	275
Maximum Power at STC (Pmax, Wp)	240	245	250	255	260	265	270	275
Maximum Power Voltage (Vmp, V)	28.3	28.6	29.0	29.3	29.5	29.8	30.1	30.5
Maximum Power Current (Imp, A)	8.48	8.57	8.63	8.72	8.81	8.88	8.97	9.06
Open-circuit Voltage (Voc, V)	35.4	35.6	35.8	36.1	36.2	36.7	36.9	37.2
Short-circuit Current (Isc, A)	9.17	9.23	9.32	9.39	9.45	9.51	9.57	9.58
Maximum System Voltage	1000VDC							
Dimensions	Normal PV module:1650x992x40mm (64.97×39.05 x1.57 inch) Large cell PV module:1665x1002x40mm (65.55×39.45 x1.57 inch) Large cell PV module:1665x1002x35mm (65.55×39.45 x1.38 inch) Normal PV module:1650x992x35mm (64.97×39.05 x1.38 inch)							
Maximum series overcurrent protective device rating	15A							

Module Type	Group 4 & 5											
xxx =	250	255	260	265	270	275	280	285	290	295	300	305
Maximum Power at STC (Pmax, Wp)	250	255	260	265	270	275	280	285	290	295	300	305
Maximum Power Voltage (Vmp, V)	34.2	34.5	34.7	34.9	35.0	35.2	35.3	35.5	35.8	36.2	36.6	36.8
Maximum Power Current (Imp, A)	7.31	7.39	7.49	7.59	7.71	7.81	7.93	8.03	8.11	8.15	8.20	8.30
Open-circuit Voltage (Voc, V)	43.5	43.7	43.9	44.1	44.2	44.4	44.5	44.7	44.9	45.1	45.3	45.6
Short-circuit Current (Isc, A)	8.05	8.18	8.26	8.33	8.43	8.49	8.58	8.61	8.69	8.76	8.84	8.91



Module Type	Group 4 & 5											Group 5	
xxx =	310	315	320	325	330	335	340	345	350	355	360	365	370
Maximum Power at STC (Pmax, Wp)	310	315	320	325	330	335	340	345	350	355	360	365	370
Maximum Power Voltage (Vmp, V)	37.0	37.2	37.4	37.6	37.8	38	38.2	38.4	38.6	38.9	39.1	39.3	39.5
Maximum Power Current (Imp, A)	8.38	8.48	8.56	8.66	8.74	8.82	8.9	8.98	9.07	9.12	9.21	9.29	9.37
Open-circuit Voltage(Voc, V)	45.9	46.2	46.4	46.7	46.9	47.2	47.5	47.8	48	48.2	48.5	48.8	49.1
Short-circuit Current (Isc, A)	8.96	9.01	9.05	9.1	9.14	9.18	9.22	9.29	9.36	9.43	9.51	9.58	9.63
Maximum System Voltage	1000VDC/1500VDC												
Dimensions	Normal PV module:1956x992x40mm (77.01×39.05 x1.57 inch) Large cell PV module:1979x1002x40mm (77.91×39.45 x1.57 inch) Half-cut PV module:1987x992x40mm (78.23×39.05 x1.57 inch) Large cell Half-cut PV module:2008x1002x40mm (79.06×39.45 x1.57 inch) Half-cut PV module:2000x992x40mm (78.74×39.05 x1.57 inch)												
Maximum series overcurrent protective device rating	20A												

Module Type	Group 6							
xxx =	250	255	260	265	270	275	280	285
Maximum Power at STC (Pmax, Wp)	250	255	260	265	270	275	280	285
Maximum Power Voltage (Vmp, V)	32.5	32.8	33.0	33.2	33.3	33.4	33.5	33.7
Maximum Power Current (Imp, A)	7.69	7.78	7.88	7.99	8.12	8.22	8.35	8.45
Open-circuit Voltage(Voc, V)	41.3	41.5	41.7	41.9	42.0	42.2	42.3	42.5
Short-circuit Current (Isc, A)	8.52	8.61	8.70	8.77	8.87	8.94	9.03	9.06



Module Type	Group 6								
xxx =	290	295	300	305	310	315	320	325	330
Maximum Power at STC (Pmax, Wp)	290	295	300	305	310	315	320	325	330
Maximum Power Voltage (Vmp, V)	34.0	34.4	34.8	34.9	35.2	35.3	35.5	35.7	35.9
Maximum Power Current (Imp, A)	8.54	8.58	8.63	8.74	8.82	8.93	9.01	9.12	9.20
Open-circuit Voltage(Voc, V)	42.7	42.8	43.0	43.3	43.6	43.9	44.1	44.5	44.7
Short-circuit Current (Isc, A)	9.15	9.22	9.31	9.38	9.43	9.48	9.53	9.55	9.57
Maximum System Voltage	1000VDC								
Dimensions	Normal PV module:1956x992x40mm (77.01×39.05 x1.57 inch) Large cell PV module: 1979x1002x40mm (77.91x39.45x1.57inch)								
Maximum series overcurrent protective device rating	15A								

Module Type	Group 9									
xxx =	200	205	210	215	220	225	230	235	240	245
Maximum Power at STC (Pmax, Wp)	200	205	210	215	220	225	230	235	240	245
Maximum Power Voltage (Vmp, V)	28.2	28.4	28.6	28.8	29.0	29.2	29.4	29.6	29.8	30.1
Maximum Power Current (Imp, A)	7.09	7.22	7.34	7.47	7.59	7.71	7.82	7.94	8.06	8.14
Open-circuit Voltage(Voc, V)	35.3	35.5	35.8	36.1	36.3	36.6	36.8	37.0	37.3	37.5
Short-circuit Current (Isc, A)	8.09	8.18	8.25	8.31	8.41	8.48	8.56	8.65	8.71	8.76



Module Type	Group 9									
xxx =	250	255	260	265	270	275	280	285	290	295
Maximum Power at STC (Pmax, Wp)	250	255	260	265	270	275	280	285	290	295
Maximum Power Voltage (Vmp, V)	30.5	30.8	30.9	31.2	31.4	31.6	31.8	32.0	32.2	32.4
Maximum Power Current (Imp, A)	8.20	8.28	8.42	8.50	8.60	8.70	8.81	8.90	9.02	9.10
Open-circuit Voltage(Voc, V)	37.7	37.9	38.0	38.2	38.4	38.5	38.6	38.7	39.5	39.7
Short-circuit Current (Isc, A)	8.85	8.92	9.10	9.19	9.28	9.40	9.49	9.51	9.55	9.61
Maximum System Voltage	1000VDC									
Dimensions	Normal PV module:1650x992x40mm (64.97×39.05 x1.57 inch) Large cell PV module:1665x1002x40mm (65.55×39.45 x1.57 inch) Large cell PV module:1665x1002x35mm (65.55×39.45 x1.38 inch) Normal PV module:1650x992x35mm (64.97×39.05 x1.38 inch)									
Maximum series overcurrent protective device rating	15A									

Module Type	Group 7 & 8										
xxx =	200	205	210	215	220	225	230	235	240	245	250
Maximum Power at STC (Pmax, Wp)	200	205	210	215	220	225	230	235	240	245	250
Maximum Power Voltage (Vmp, V)	28.2	28.4	28.6	28.8	29.0	29.2	29.4	29.6	29.8	30.1	30.5
Maximum Power Current (Imp, A)	7.09	7.22	7.34	7.47	7.59	7.71	7.82	7.94	8.06	8.14	8.20
Open-circuit Voltage(Voc, V)	35.3	35.5	35.8	36.1	36.3	36.6	36.8	37.0	37.3	37.5	37.7
Short-circuit Current (Isc, A)	8.09	8.18	8.25	8.31	8.41	8.48	8.56	8.65	8.71	8.76	8.85
Module Type	Group 7 & 8										
xxx=	255	260	265	270	275	280	285	290	295	300	305
Maximum Power at STC (Pmax, Wp)	255	260	265	270	275	280	285	290	295	300	305
Maximum Power Voltage (Vmp, V)	30.8	30.9	31.2	31.4	31.6	31.8	32.0	32.2	32.4	32.6	32.8



Module Type	Group 7 & 8										
Maximum Power Current (Imp, A)	8.28	8.42	8.50	8.60	8.70	8.81	8.90	9.02	9.10	9.21	9.30
Open-circuit Voltage (Voc, V)	38.0	37.9	38.2	38.4	38.5	38.6	38.7	39.5	39.7	40.1	40.3
Short-circuit Current (Isc, A)	8.96	9.10	9.19	9.28	9.40	9.49	9.51	9.55	9.61	9.72	9.83

Module Type	Group 7 & 8					Group 8			
xxx =	310	315	320	325	330	335	340	345	350
Maximum Power at STC (Pmax, Wp)	310	315	320	325	330	335	340	345	350
Maximum Power Voltage (Vmp, V)	33.0	33.2	33.4	33.6	33.8	34.0	34.2	34.4	34.6
Maximum Power Current (Imp, A)	9.4	9.49	9.59	9.68	9.77	9.87	9.96	10.04	10.13
Open-circuit Voltage (Voc, V)	40.5	40.7	40.9	41.1	41.3	41.5	41.7	41.9	42.1
Short-circuit Current (Isc, A)	9.92	10.04	10.15	10.2	10.31	10.36	10.55	10.64	10.73
Maximum System Voltage	1000VDC/1500VDC								
Dimensions	Normal PV module :1650x992x40mm (64.97×39.05 x1.57 inch) Half-cut PV module:1665x992x40mm (65.55×39.05 x1.57 inch) Large cell PV module :1665x1002x35mm (65.55×39.45 x1.38 inch) Normal PV module :1650x992x35mm (64.97×39.05 x1.38								
Maximum series overcurrent protective device rating	20A								

Module Type	Group 10 & 11												
xxx =	250	255	260	265	270	275	280	285	290	295	300	305	310
Maximum Power at STC (Pmax, Wp)	250	255	260	265	270	275	280	285	290	295	300	305	310
Maximum Power Voltage (Vmp, V)	34.8	35.0	35.3	35.6	35.9	36.1	36.3	36.5	36.7	36.8	37.0	37.2	37.4
Maximum Power Current (Imp, A)	7.18	7.29	7.37	7.44	7.52	7.62	7.71	7.81	7.90	8.02	8.11	8.20	8.29
Open-circuit Voltage (Voc, V)	43.4	43.6	43.9	44.1	44.4	44.6	44.8	45.0	45.2	45.3	45.5	45.7	45.9
Short-circuit Current (Isc, A)	7.84	7.92	7.99	8.07	8.15	8.23	8.32	8.40	8.47	8.55	8.64	8.72	8.80



Module Type	Group 10 & 11												
xxx =	315	320	325	330	335	340	345	350	355	360	365	370	375
Maximum Power at STC (Pmax, Wp)	315	320	325	330	335	340	345	350	355	360	365	370	375
Maximum Power Voltage (Vmp, V)	37.6	37.8	38.0	38.2	38.4	38.7	38.9	39.1	39.3	39.5	39.7	39.9	40.2
Maximum Power Current (Imp, A)	8.38	8.47	8.55	8.64	8.72	8.79	8.87	8.94	9.04	9.12	9.20	9.28	9.33
Open-circuit Voltage(Voc, V)	46.1	46.3	46.5	46.7	46.9	47.1	47.3	47.5	47.8	48.0	48.2	48.5	48.7
Short-circuit Current (Isc, A)	8.87	8.95	9.03	9.11	9.18	9.24	9.31	9.38	9.45	9.51	9.57	9.61	9.68

Module Type	Group 10 & 11					Group 11			
xxx =	380	385	390	395	400	405	410	415	420
Maximum Power at STC (Pmax, Wp)	380	385	390	395	400	405	410	415	420
Maximum Power Voltage (Vmp, V)	40.5	40.8	41.1	41.4	41.7	42.0	42.3	42.6	42.9
Maximum Power Current (Imp, A)	9.39	9.44	9.49	9.55	9.6	9.65	9.69	9.74	9.80
Open-circuit Voltage(Voc, V)	48.9	49.1	49.3	49.5	49.8	50.1	50.4	50.7	51.0
Short-circuit Current (Isc, A)	9.75	9.92	10.12	10.23	10.36	10.48	10.60	10.72	10.84
Maximum System Voltage	1000VDC/1500VDC								
Dimensions	Normal PV module: 1956x992x40mm (77.01×39.05 x1.57 inch) Large cell PV module: 1979x1002x40mm (77.91×39.45 x1.57 inch) Half-cut PV module: 1987x992x40mm (78.23×39.05 x1.57 inch) Large cell Half-cut PV module: 2008x1002x40mm (79.06×39.45 x1.57 inch) Half-cut PV module: 2000x992x40mm (78.74×39.05 x1.57 inch)								
Maximum series overcurrent protective device rating	20A								



Module Type	Group 12											
xxx =	250	255	260	265	270	275	280	285	290	295	300	305
Maximum Power at STC (Pmax, Wp)	250	255	260	265	270	275	280	285	290	295	300	305
Maximum Power Voltage (Vmp, V)	34.8	35.0	35.3	35.6	35.9	36.1	36.3	36.5	36.7	36.8	37.0	37.2
Maximum Power Current (Imp, A)	7.18	7.29	7.37	7.44	7.52	7.62	7.71	7.81	7.90	8.02	8.11	8.20
Open-circuit Voltage(Voc, V)	43.4	43.6	43.9	44.1	44.4	44.6	44.8	45.0	45.2	45.3	45.5	45.7
Short-circuit Current (Isc, A)	7.84	7.92	7.99	8.07	8.15	8.23	8.32	8.40	8.47	8.55	8.64	8.72

Module Type	Group 12										
xxx =	310	315	320	325	330	335	340	345	350	355	
Maximum Power at STC (Pmax, Wp)	310	315	320	325	330	335	340	345	350	355	
Maximum Power Voltage (Vmp, V)	37.4	37.6	37.8	38.0	38.2	38.4	38.7	38.9	39.1	39.3	
Maximum Power Current (Imp, A)	8.29	8.38	8.47	8.55	8.64	8.72	8.79	8.87	8.94	9.04	
Open-circuit Voltage(Voc, V)	45.9	46.1	46.3	46.5	46.7	46.9	47.1	47.3	47.5	47.8	
Short-circuit Current (Isc, A)	8.80	8.87	8.95	9.03	9.11	9.18	9.24	9.31	9.38	9.45	
Maximum System Voltage	1000VDC										
Dimensions	Normal PV module: 1956x992x40mm (77.01×39.05 x1.57 inch) Large cell PV module: 1979x1002x40mm (77.91×39.45 x1.57 inch)										
Maximum series overcurrent protective device rating	15A										



Module Type	Group 13									
xxx =	375	380	385	390	395	400	405	410	415	420
Maximum Power at STC (Pmax, Wp)	375	380	385	390	395	400	405	410	415	420
Maximum Power Voltage (Vmp, V)	39.25	39.36	39.50	39.62	39.83	40.01	40.19	40.38	40.50	40.65
Maximum Power Current (Imp, A)	9.56	9.66	9.76	9.84	9.92	10.00	10.08	10.16	10.25	10.33
Open-circuit Voltage(Voc, V)	47.92	47.96	48.10	48.14	48.26	48.35	48.45	48.56	48.64	48.74
Short-circuit Current (Isc, A)	9.92	10.02	10.08	10.17	10.23	10.32	10.42	10.51	10.61	10.70

Module Type	Group 13									
xxx =	375	380	385	390	395	400	405	410	415	420
Maximum Power at STC (Pmax, Wp)	410	415	420	425	430	435	440	445	450	455
Maximum Power Voltage (Vmp, V)	39.25	39.36	39.50	39.62	39.83	40.01	40.19	40.38	40.50	40.65
Maximum Power Current (Imp, A)	10.46	10.57	10.68	10.77	10.86	10.94	11.03	11.11	11.22	11.31
Open-circuit Voltage(Voc, V)	47.92	47.96	48.10	48.14	48.26	48.35	48.45	48.56	48.64	48.74
Short-circuit Current (Isc, A)	10.86	10.97	11.03	11.13	11.20	11.30	11.40	11.51	11.61	11.71
Maximum System Voltage	1500VDC									
Dimensions	2031*1008*40 (79.96*39.69*1.57 inch)									
Maximum series overcurrent protective device rating	25A									
Bifaciality Coefficient	$\phi_{Isc}=[Isc(back)]/[Isc(front)]= 0.71$ $\phi_{Voc}=[Voc(back)]/[Voc(front)]= 0.98$ $\phi_{Pmmp}=[Pmmp(back)]/[Pmmp(front)]= 0.70$									





Module Type	Group 14							
xxx =	315	320	325	330	335	340	345	350
Maximum Power at STC (Pmax, Wp)	315	320	325	330	335	340	345	350
Maximum Power Voltage (Vmp, V)	32.7	32.9	33.1	33.24	33.40	33.62	33.76	33.94
Maximum Power Current (Imp, A)	9.63	9.73	9.82	9.93	10.03	10.11	10.22	10.31
Open-circuit Voltage(Voc, V)	39.9	40.1	40.3	40.39	40.46	40.60	40.75	40.87
Short-circuit Current (Isc, A)	9.99	10.07	10.15	10.25	10.34	10.43	10.53	10.62

Module Type	Group 14							
xxx =	315	320	325	330	335	340	345	350
Maximum Power at STC (Pmax, Wp)	345	350	355	360	365	370	375	380
Maximum Power Voltage (Vmp, V)	32.7	32.9	33.10	33.24	33.40	33.62	33.76	33.94
Maximum Power Current (Imp, A)	10.54	10.65	10.75	10.87	10.98	11.07	11.18	11.29
Open-circuit Voltage(Voc, V)	39.9	40.1	40.30	40.39	40.46	40.60	40.75	40.87
Short-circuit Current (Isc, A)	10.93	11.02	11.11	11.22	11.32	11.42	11.52	11.62
Maximum System Voltage	1500VDC							
Dimensions	1704*1008*35 (67.09*39.69*1.38 inch)							
Maximum series overcurrent protective device rating	25A							
Bifaciality Coefficient	$\phi_{Isc}=[Isc(back)]/[Isc(front)]= 0.71$ $\phi_{Voc}=[Voc(back)]/[Voc(front)]= 0.98$ $\phi_{Pmmp}=[Pmmp(back)]/[Pmmp(front)]= 0.70$							



Module Type	Group 15					
xxx =	375	380	385	390	395	400
Maximum Power at STC (Pmax, Wp)	375	380	385	390	395	400
Maximum Power Voltage (Vmp, V)	39.32	39.43	39.53	39.64	39.74	39.85
Maximum Power Current (Imp, A)	9.54	9.64	9.74	9.84	9.94	10.04
Open-circuit Voltage(Voc, V)	48.10	48.20	48.31	48.40	48.50	48.63
Short-circuit Current (Isc, A)	10.07	10.17	10.26	10.36	10.45	10.54

Module Type	Group 15					
xxx =	375	380	385	390	395	400
Maximum Power at STC (Pmax, Wp)	420	425	430	435	440	445
Maximum Power Voltage (Vmp, V)	39.32	39.43	39.53	39.64	39.74	39.85
Maximum Power Current (Imp, A)	10.67	10.79	10.90	11.01	11.12	11.23
Open-circuit Voltage(Voc, V)	48.10	48.20	48.31	48.40	48.50	48.63
Short-circuit Current (Isc, A)	11.27	11.38	11.48	11.59	11.69	11.79
Maximum System Voltage	1500VDC					
Dimensions	2031*1008*40 (79.96*39.69*1.57 inch)					
Maximum series overcurrent protective device rating	25A					
Bifaciality Coefficient	$\phi_{Isc}=[Isc(back)]/[Isc(front)]=0.89$ $\phi_{Voc}=[Voc(back)]/[Voc(front)]=0.99$ $\phi_{Pmmp}=[Pmmp(back)]/[Pmmp(front)]=0.88$					



Module Type	Group 16			
xxx =	315	320	325	330
Maximum Power at STC (Pmax, Wp)	315	320	325	330
Maximum Power Voltage (Vmp, V)	33.00	33.17	33.38	33.51
Maximum Power Current (Imp, A)	9.55	9.65	9.74	9.85
Open-circuit Voltage(Voc, V)	40.19	40.32	40.43	40.56
Short-circuit Current (Isc, A)	10.12	10.23	10.32	10.43

Module Type	Group 16			
xxx =	315	320	325	330
Maximum Power at STC (Pmax, Wp)	350	355	360	365
Maximum Power Voltage (Vmp, V)	33.00	33.17	33.38	33.51
Maximum Power Current (Imp, A)	10.68	10.80	10.90	11.02
Open-circuit Voltage(Voc, V)	40.19	40.32	40.43	40.56
Short-circuit Current (Isc, A)	11.32	11.45	11.55	11.67
Maximum System Voltage	1500VDC			
Dimensions	1704*1008*35 (67.09*39.69*1.38 inch)			
Maximum series overcurrent protective device rating	25A			
Bifaciality Coefficient	$\phi_{Isc} = [Isc(back)]/[Isc(front)] = 0.89$ $\phi_{Voc} = [Voc(back)]/[Voc(front)] = 0.99$ $\phi_{Pmmp} = [Pmmp(back)]/[Pmmp(front)] = 0.88$			



Module Type	Group 17						
xxx =	300	305	310	315	320	325	330
Maximum Power at STC (Pmax, Wp)	300	305	310	315	320	325	330
Maximum Power Voltage (Vmp, V)	32.6	32.8	33	33.2	33.4	33.6	33.8
Maximum Power Current (Imp, A)	9.21	9.30	9.4	9.49	9.59	9.68	9.77
Open-circuit Voltage(Voc, V)	40.1	40.3	40.5	40.7	40.9	41.1	41.3
Short-circuit Current (Isc, A)	9.98	10.07	10.15	10.23	10.31	10.50	10.61
Maximum System Voltage	1000VDC						
Dimensions	Normal PV module : 1650x992x40mm (64.97×39.05 x1.57 inch) Normal PV module: 1650x992x35mm (64.97×39.05 x1.38 inch) Large cell PV module: 1665x1002x35mm (65.55×39.45 x1.38 inch)						
Maximum series overcurrent protective device rating	20A						

Module Type	Group 18										
xxx =	300	305	310	315	320	325	330	335	340	345	350
Maximum Power at STC (Pmax, Wp)	300	305	310	315	320	325	330	335	340	345	350
Maximum Power Voltage (Vmp, V)	32.30	32.52	32.74	32.95	33.16	33.37	33.54	33.74	33.93	34.12	34.31
Maximum Power Current (Imp, A)	9.29	9.38	9.47	9.56	9.65	9.74	9.84	9.93	10.02	10.11	10.20
Open-circuit Voltage(Voc, V)	39.40	39.60	39.80	40.00	40.20	40.40	40.60	40.80	41.00	41.20	41.40
Short-circuit Current (Isc, A)	9.98	10.07	10.15	10.23	10.31	10.50	10.61	10.73	10.82	10.91	11
Maximum System Voltage	1000VDC										
Dimensions	Half-cut PV module: 1665x992x40mm (65.55×39.05 x1.57 inch) Half-cut PV module: 1665x992x35mm (65.55×39.05 x1.38 inch) Large cell Half-cut PV module: 1684x1002x35mm (66.30×39.45 x1.38 inch) Large cell Half-cut PV module: 1684x1002x30mm (66.30×39.45 x1.18 inch)										
Maximum series overcurrent protective device rating	20A										



Module Type	Group 19										
xxx =	370	375	380	385	390	395	400	405	410	415	420
Maximum Power at STC (Pmax, Wp)	370	375	380	385	390	395	400	405	410	415	420
Maximum Power Voltage (Vmp, V)	38.58	38.86	39.10	39.37	39.64	39.90	40.16	40.42	40.68	40.93	41.18
Maximum Power Current (Imp, A)	9.59	9.65	9.72	9.78	9.84	9.90	9.96	10.02	10.08	10.14	10.20
Open-circuit Voltage(Voc, V)	47.80	48.00	48.20	48.40	48.60	48.80	49.10	49.40	49.60	49.90	50.20
Short-circuit Current (Isc, A)	10.15	10.23	10.3	10.38	10.46	10.54	10.61	10.69	10.76	10.82	10.88
Maximum System Voltage	1000VDC/1500VDC										
Dimensions	Half-cut PV module: 1987x992x40mm (78.23x39.05 x1.57 inch) Half-cut PV module: 2000x992x40mm (78.74x39.05 x1.57 inch) Large cell Half-cut PV module: 2008x1002x40mm (79.06x39.45 x1.57 inch) Large cell Half-cut PV module: 2008x1002x30mm (79.06x39.45 x1.18 inch)										
Maximum series overcurrent protective device rating	20A										

Module Type	Group 20									
xxx =	430	435	440	445	450	455	460	465	470	475
Maximum Power at STC (Pmax, Wp)	430	435	440	445	450	455	460	465	470	475
Maximum Power Voltage (Vmp, V)	42.45	42.57	42.68	42.79	42.90	43.01	43.12	43.22	43.32	43.42
Maximum Power Current (Imp, A)	10.13	10.22	10.31	10.40	10.49	10.58	10.67	10.76	10.85	10.94
Open-circuit Voltage(Voc, V)	51.10	51.20	51.30	51.40	51.50	51.60	51.70	51.90	52.10	52.20
Short-circuit Current (Isc, A)	10.96	11.05	11.14	11.23	11.32	11.41	11.50	11.59	11.68	11.77
Maximum System Voltage	1000VDC/1500VDC									
Dimensions	2182*1032*40mm (85.91*40.63*1.57 inch) 2182*1029*40mm (85.91*40.51*1.57 inch)									
Maximum series overcurrent protective device rating	20A									



Module Type	Group 21							
xxx =	365	370	375	380	385	390	395	400
Maximum Power at STC (Pmax, Wp)	365	370	375	380	385	390	395	400
Maximum Power Voltage (Vmp, V)	35.79	35.86	35.92	35.99	36.05	36.11	36.18	36.24
Maximum Power Current (Imp, A)	10.20	10.32	10.44	10.56	10.68	10.80	10.92	11.04
Open-circuit Voltage(Voc, V)	43.32	43.41	43.49	43.58	43.66	43.75	43.92	44.08
Short-circuit Current (Isc, A)	11.03	11.13	11.23	11.33	11.43	11.53	11.63	11.73
Maximum System Voltage	1000VDC/1500VDC							
Dimensions	1855*1032*35mm (73.03*40.63*1.38 inch) 1855*1029*35mm (73.03*40.51*1.38 inch)							
Maximum series overcurrent protective device rating	20A							

Module Type	Group 22							
xxx =	330	335	340	345	350	355	360	365
Maximum Power at STC (Pmax, Wp)	330	335	340	345	350	355	360	365
Maximum Power Voltage (Vmp, V)	32.64	32.75	32.85	32.95	33.05	33.15	33.24	33.34
Maximum Power Current (Imp, A)	10.11	10.23	10.35	10.47	10.59	10.71	10.83	10.95
Open-circuit Voltage(Voc, V)	39.31	39.41	39.51	39.61	39.71	39.81	39.91	40.01
Short-circuit Current (Isc, A)	10.92	11.04	11.16	11.28	11.40	11.52	11.64	11.76
Maximum System Voltage	1000VDC/1500VDC							
Dimensions	1692*1029*30mm (66.61*40.51*1.18 inch)							
Maximum series overcurrent protective device rating	20A							



Module Type	Group 23									
xxx =	430	435	440	445	450	455	460	465	470	475
Maximum Power at STC (Pmax, Wp)	430	435	440	445	450	455	460	465	470	475
Maximum Power Voltage (Vmp, V)	42.41	42.52	42.64	42.75	42.86	42.97	43.08	43.18	43.28	43.38
Maximum Power Current (Imp, A)	10.14	10.23	10.32	10.41	10.50	10.59	10.68	10.77	10.86	10.95
Open-circuit Voltage(Voc, V)	51.10	51.20	51.30	51.40	51.50	51.60	51.70	51.92	52.14	52.24
Short-circuit Current (Isc, A)	10.96	11.05	11.14	11.23	11.32	11.41	11.50	11.59	11.68	11.77
Maximum System Voltage	1000VDC/1500VDC									
Dimensions	2182*1032*40mm (85.91*40.63*1.57 inch) 2182*1029*40mm (85.91*40.51*1.57 inch)									
Maximum series overcurrent protective device rating	20A									

Module Type	Group 24							
xxx =	365	370	375	380	385	390	395	400
Maximum Power at STC (Pmax, Wp)	365	370	375	380	385	390	395	400
Maximum Power Voltage (Vmp, V)	36.00	36.10	36.20	36.30	36.39	36.49	36.58	36.67
Maximum Power Current (Imp, A)	10.14	10.25	10.36	10.47	10.58	10.69	10.80	10.91
Open-circuit Voltage(Voc, V)	43.32	43.41	43.49	43.58	43.66	43.75	43.93	44.12
Short-circuit Current (Isc, A)	10.94	11.03	11.12	11.21	11.30	11.39	11.48	11.57
Maximum System Voltage	1000VDC/1500VDC							
Dimensions	1855*1032*35mm (73.03*40.63*1.38 inch) 1855*1029*35mm (73.03*40.51*1.38 inch)							
Maximum series overcurrent protective device rating	20A							



Module Type	Group 25							
xxx =	330	335	340	345	350	355	360	365
Maximum Power at STC (Pmax, Wp)	330	335	340	345	350	355	360	365
Maximum Power Voltage (Vmp, V)	32.64	32.75	32.85	32.95	33.05	33.15	33.24	33.34
Maximum Power Current (Imp, A)	10.11	10.23	10.35	10.47	10.59	10.71	10.83	10.95
Open-circuit Voltage(Voc, V)	39.31	39.41	39.51	39.61	39.71	39.81	39.91	40.01
Short-circuit Current (Isc, A)	10.92	11.04	11.16	11.28	11.40	11.52	11.64	11.76
Maximum System Voltage	1000VDC/1500VDC							
Dimensions	1692*1029*30mm (66.61*40.51*1.18 inch)							
Maximum series overcurrent protective device rating	20A							





## Note

---

---

---

---

---

---



## **7. Contact us**

JinkoSolar (U.S.) Inc.  
595 Market Street, Suite 2200  
San Francisco, CA 94105  
Tel: +1 (415) 402 0502  
Fax: +1 (415) 402 0703  
[us@jinkosolar.com](mailto:us@jinkosolar.com)

**JinkoSolar (U.S.) Inc.**

595 Market Street, Suite 2200, San Francisco, CA 94105

**Tel:** +1 (415) 402 0502 | **Fax:** +1 (415) 402 0703 | [us@jinkosolar.com](mailto:us@jinkosolar.com)

[www.jinkosolar.us](http://www.jinkosolar.us) | **Technic Support:** [us.ts@jinkosolar.com](mailto:us.ts@jinkosolar.com) | **After-sales:** [us@jinkosolar.com](mailto:us@jinkosolar.com)